



Label Rewinder Family


T10 / T20 / T30

The Rewinder Everyone Can Use

The T10 / T20 / T30 rewriter has an idler arm that can be positioned to rewind labels from either side of the printer. Depending on the users requirements, the rewriter can rewind „inside or outside“ label rolls.



VR(Speed Adjustment)

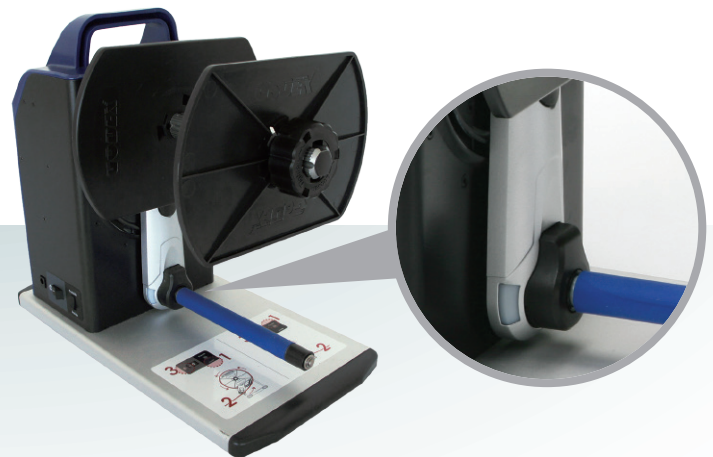

Colored LED indicator
provides rewriter
operation status

T10 / T20 / T30

Label Rewinder Family

Model		T10	T20	T30
Paper Width		4.72" (Max.)	7" (Max.)	8.46"
Rewind Speed		14 IPS	14 IPS	6 IPS
Label Roll		8" (Max.)	6" (Max.)	6.3" /Max.)
Core Roll		Coreless, 1" (25.2~25.6mm), 1.5"x2 (37.4~38.0mm&40~40.6mm), 3" (76~76.6mm)		
Label Roll Weight		5 Kg		
Rewinding		Label Inside / Outside		
Switches		Rewind		
Motor		Hybrid Motor		
Power		100-240V AC 24W, 24V Adapter		
Environment	Operation Temperature	5°C bis 40°C (41°F bis 104°F)		
	Storage Temperature	-20°C bis 60° (-4°F bis 122°F)		
Humidity		10-85%, (non-condensing RH)		
Agency Approvals		CE 、 FCC Class A		
Size (H*W*D)		303mm*180mm*349mm	303mm*180mm*394mm	303 mm*230mm*349 mm
Weight		5 Kg (11lb)		5.5 Kg (12lb)
* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.				